


FLANGE SO A105 300

Dimensiones en pulgadas y (milímetros)

Tamaño nominal de la tubería	Ø exterior O	Mínimo espesor tf	Ø Buje X	Longitud con eje Y	Ø Mínimo agujero B	Ø Cara elevada R	Taladros			
							Ø K central.	Número de tal	Ø alto. L	Ø Tornillo
1/2 (DN15)	3,75 (95)	0,5 (12,7)	1,5 (38)	0,81 (21)	0,88 (22,2)	1,38 (34,9)	2,62 (66,7)	4	5/8 (15,875)	1/2 (12,7)
3/4 (DN20)	4,62 (115)	0,56 (14,3)	1,88 (48)	0,94 (24)	1,09 (27,7)	1,69 (42,9)	3,25 (82,6)	4	3/4 (19,05)	5/8 (15,875)
1 (DN25)	4,88 (125)	0,62 (15,9)	2,12 (54)	1 (25)	1,36 (34,5)	2 (50,8)	3,5 (88,9)	4	3/4 (19,05)	5/8 (15,875)
1 1/4 (DN32)	5,25 (135)	0,69 (17,5)	2,5 (64)	1 (25)	1,7 (43,2)	2,5 (63,5)	3,88 (98,4)	4	3/4 (19,05)	5/8 (15,875)
1 1/2 (DN40)	6,12 (155)	0,75 (19,1)	2,75 (70)	1,13 (29)	1,95 (49,5)	2,88 (73)	4,5 (114,3)	4	7/8 (22,225)	3/4 (19,05)
2 (DN50)	6,5 (165)	0,81 (20,7)	3,31 (84)	1,25 (32)	2,44 (61,9)	3,62 (92,1)	5 (127)	8	3/4 (19,05)	5/8 (15,875)
2 1/2 (DN65)	7,5 (190)	0,94 (23,9)	3,94 (100)	1,44 (37)	2,94 (74,6)	4,12 (104,8)	5,88 (149,2)	8	7/8 (22,225)	3/4 (19,05)
3 (DN80)	8,25 (210)	1,06 (27)	4,62 (117)	1,63 (41)	3,57 (90,7)	5 (127)	6,62 (168,3)	8	7/8 (22,225)	3/4 (19,05)
3 1/2 (DN90)	9 (230)	1,12 (28,6)	5,25 (133)	1,69 (43)	4,07 (103,4)	5,5 (139,7)	7,25 (184,2)	8	7/8 (22,225)	3/4 (19,05)
4 (DN100)	10 (255)	1,19 (30,2)	5,75 (146)	1,82 (46)	4,57 (116,1)	6,19 (157,2)	7,88 (200)	8	7/8 (22,225)	3/4 (19,05)
5 (DN125)	11 (280)	1,31 (33,4)	7 (178)	1,94 (49)	5,66 (143,8)	7,31 (185,7)	9,25 (235)	8	7/8 (22,225)	3/4 (19,05)
6 (DN150)	12,5 (320)	1,38 (35)	8,12 (206)	2 (51)	6,72 (170,7)	8,5 (215,9)	10,62 (269,9)	12	7/8 (22,225)	3/4 (19,05)
8 (DN200)	15 (380)	1,56 (39,7)	10,25 (260)	2,38 (60)	8,72 (221,5)	10,62 (269,9)	13 (330,2)	12	1 (25,4)	7/8 (22,225)
10 (DN250)	17,5 (445)	1,81 (46,1)	12,62 (321)	2,56 (65)	10,88 (276,2)	12,75 (323,8)	15,25 (387,4)	16	1 1/8 (28,575)	1 (25,4)
12 (DN300)	20,5 (520)	1,94 (49,3)	14,75 (375)	2,82 (71)	12,88 (327)	15 (381)	17,75 (450,8)	16	1 1/4 (31,75)	1 1/8 (28,575)
14 (DN350)	23 (585)	2,06 (52,4)	16,75 (425)	2,94 (75)	14,14 (359,2)	16,25 (412,8)	20,25 (514,4)	20	1 1/4 (31,75)	1 1/8 (28,575)
16 (DN400)	25,5 (650)	2,19 (55,6)	19 (483)	3,19 (81)	16,16 (410,5)	18,5 (469,9)	22,5 (571,5)	20	1 3/8 (34,925)	1 1/4 (31,75)
18 (DN450)	28 (710)	2,31 (58,8)	21 (533)	3,44 (87)	18,18 (461,8)	21 (533,4)	24,75 (628,6)	24	1 3/8 (34,925)	1 1/4 (31,75)
20 (DN500)	30,5 (775)	2,44 (62)	23,12 (587)	3,69 (94)	20,2 (513,1)	23 (584,2)	27 (685,8)	24	1 3/8 (34,925)	1 1/4 (31,75)
24 (DN600)	36 (915)	2,69 (68,3)	27,62 (702)	4,13 (105)	24,25 (616)	27,25 (692,2)	32 (812,8)	24	1 5/8 (41,275)	1 1/2 (38,1)

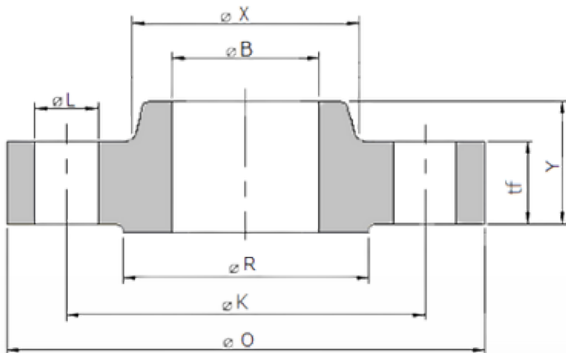

CONTÁCTANOS

Lautaro 2083 2097
Lote 5, Concepción

ventas@wenganindustrial.cl

+56 9 8731 4484

www.wenganindustrial.cl

SÍGUENOS EN
REDES SOCIALES



@wenganindustrialtda